OB36, OB52, OBS36, OBS52, OBSB162

dacor The Life of the Kitchen®

36”, 52” Wide Outdoor Grills
16” Wide Side Burner

PLANNING GUIDE

All tolerances: +1/16”, -0, (+1.6mm, -0) unless otherwise stated

⚠ WARNING

- Observe all governing codes and ordinances during planning and installation. Contact your local building department for further information.
- This appliance must be installed in accordance with the accompanying installation instructions.

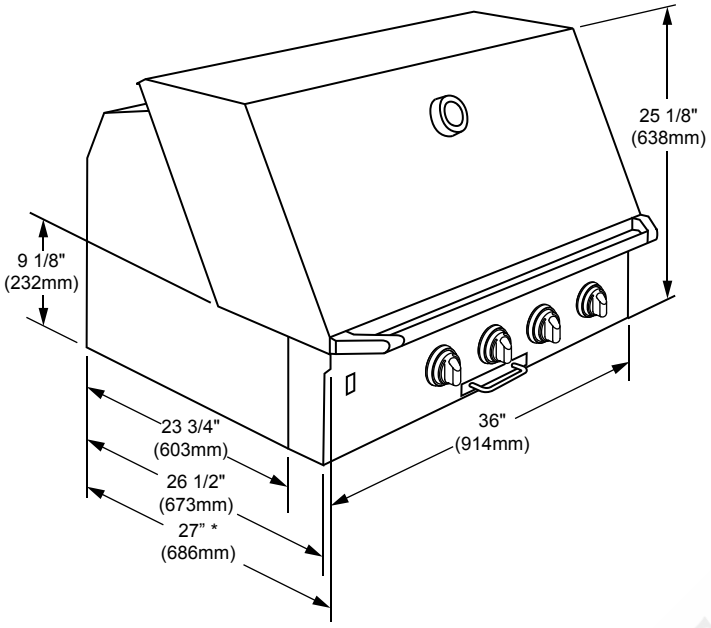

OB/OBS36 OVERALL DIMENSIONS

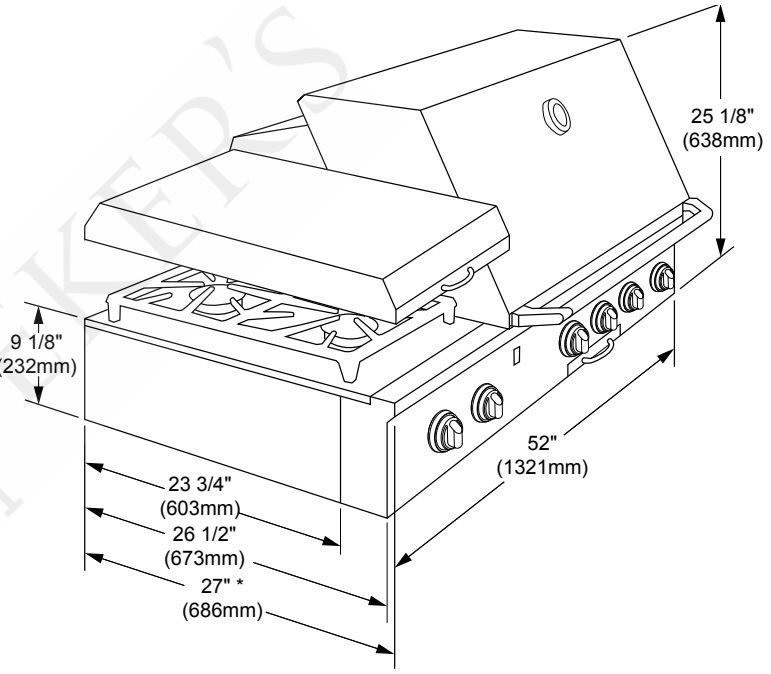

OB/OBS52 OVERALL DIMENSIONS

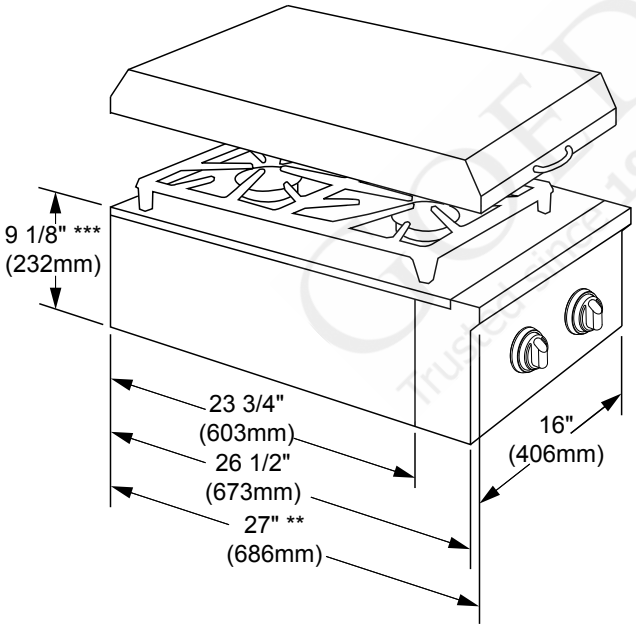

OBSB162 OVERALL DIMENSIONS

*Total depth with handle: 30” (762mm)

**Total depth with knobs: 28 5/8” (753mm)

***Total height with cover: 12” (305mm)

Model Type	Electrical Circuit Required	Total Connected Load	Gas Type	Manifold Pressure	Minimum Gas Supply Pressure
Natural Gas	120 Vac, 60 Hz, 15 Amp.	2.9 Amps (0.35 kW)	Natural	4” Water Column	5” Water Column
LP Gas	120 Vac, 60 Hz, 15 Amp.	2.9 Amps (0.35 kW)	Propane	11” Water Column	12” Water Column

NOTE:

Supply access for the rotisserie power or an alternate 120 Vac duplex outlet location.

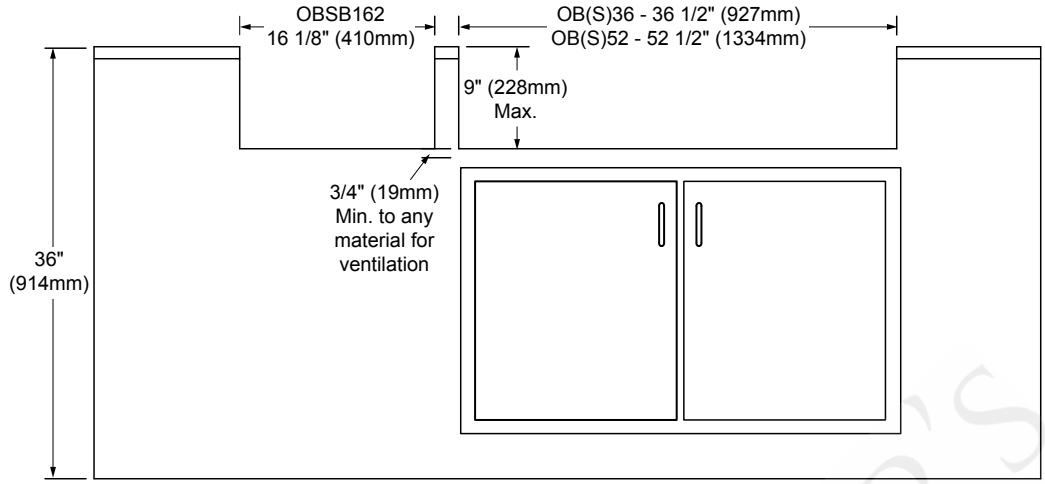

OBSB162 & OB/OBS/36/52
CUTOUT DIMENSIONS, FRONT VIEW
(OBAD 36” ACCESSORY DOOR SHOWN)

Specifications	Measurements
Overall Width	OBAD20 - 19 1/2” (495mm) OBAD36 - 35 7/8” (911mm)
Overall Height	21” (533mm)
Overall Depth	1/4” (6mm) deep return on frame edge
Cutout Width	OBAD20 - 16 3/4” (425mm) OBAD36 - 33 1/8” (841mm)
Cutout Height	18 3/4” (476mm)
Cutout Depth	3” (76mm) Minimum
Number of doors	OBAD20 - 1 OBAD36 - 2

ACCESSORY DOOR CUTOUT DIMENSIONS

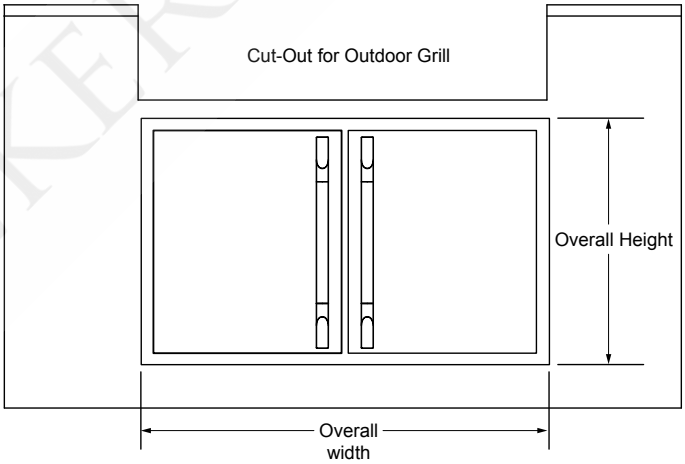

OBADXX ACCESSORY DOOR
DIMENSIONS, FRONT VIEW
(OBAD36 SHOWN)

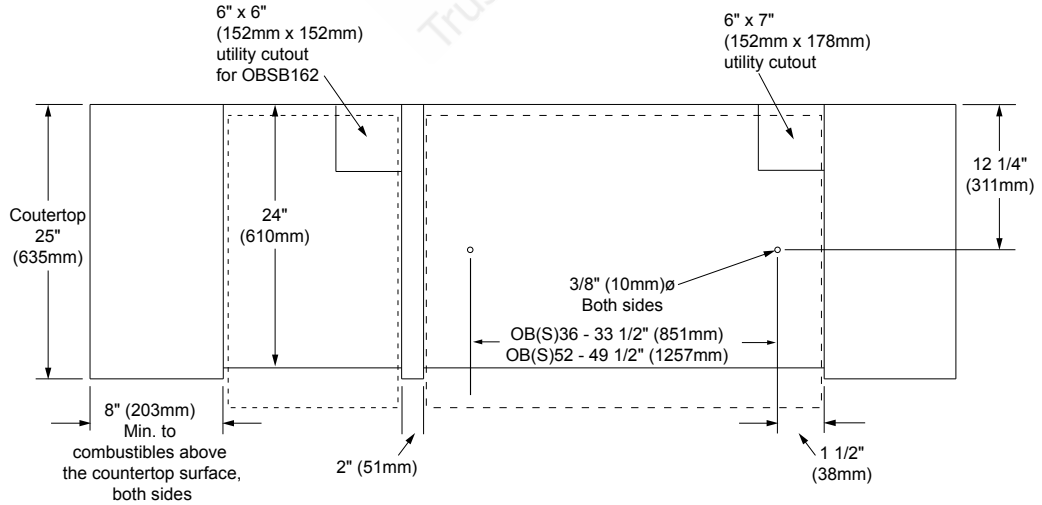

All tolerances: +1/16”, -0, (+1.6mm, -0) unless otherwise stated

OBSB162 & OB/OBS/36/52
CUTOUT DIMENSIONS, TOP VIEW

All tolerances: +1/16”, -0, (+1.6mm, -0) unless otherwise stated

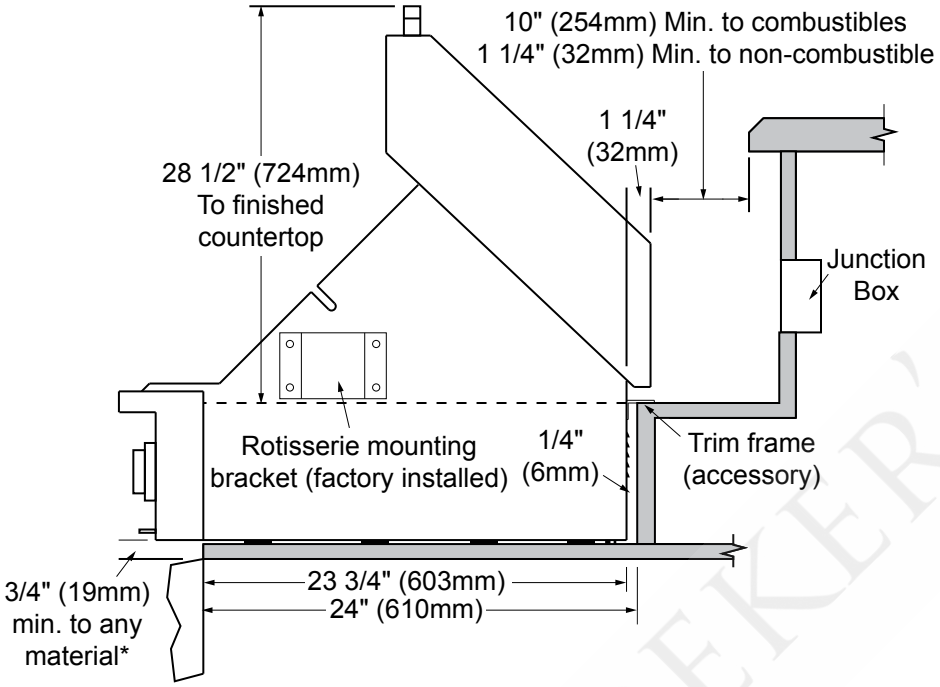

OB36, OBS36, OB52 AND OBS52
CUTOUT DIMENSIONS, SIDE VIEW

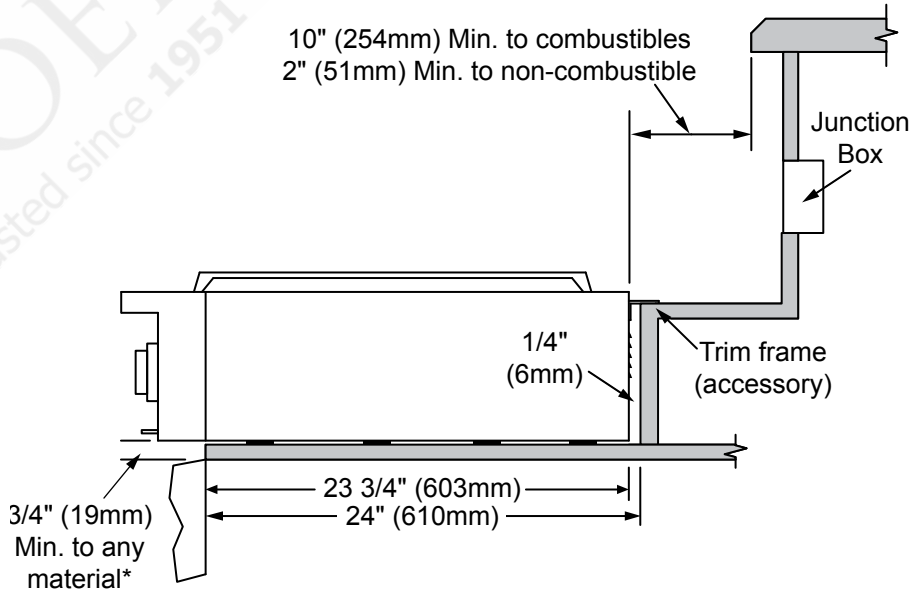

OBSB162 CUTOUT DIMENSIONS
SIDE VIEW

GOEDEKER'S Trusted since 1951

Family Owned
American Made